

10W MONOCRYSTALLINE MODULES

Product Description:

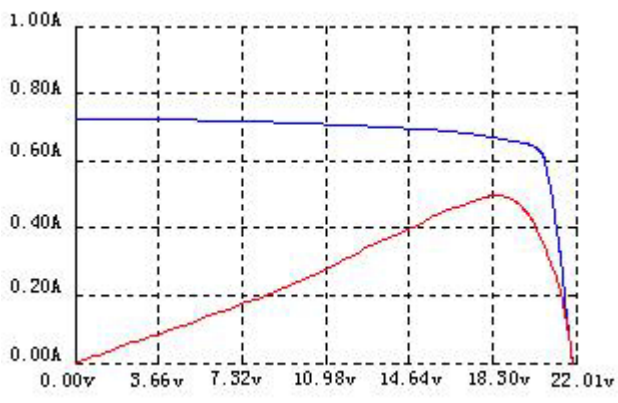

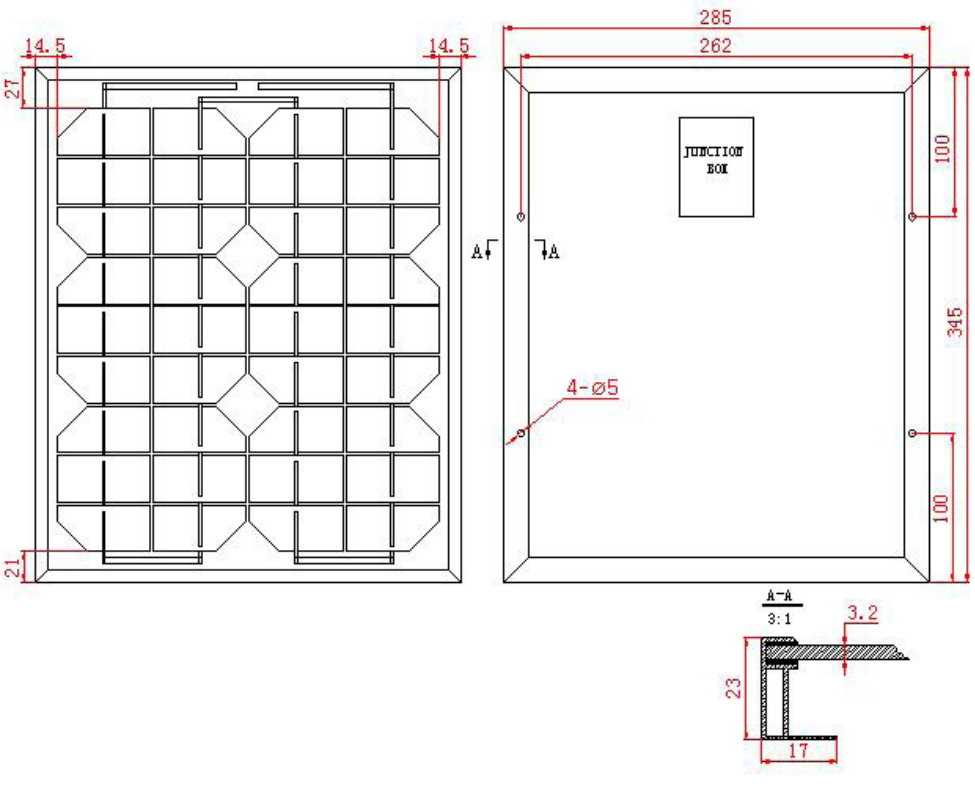
Specification	
Cells	Mono crystal 31.25mmx62.5mm square
Number of cells	36 (4x9) series connected
Typical application	12V DC
Maximum voltage	600V DC
Size	347(L) x287(W) x23(H) mm
Weight	0.8 Kgs
Front glass	3.2 mm

Tolerance		
Parameter	Values	Unit
Operating temperature	-45 to 80	°c
Hail diameter @ 80Km/h	Up to 25	mm
Continuous wind pressure	Up to 24	m/s

Connection terminals	
Connector type	Connector type with BOX01

Parameter	
Model	DSP10D
Rating power (Pm)	10W
Efficiency of cell	≥14.51%
Tolerance	±3%
Rated current (Im)	0.57A
Rated voltage (Vm)	17.4V
Short circuitCurrent (Isc)	0.82A
Open circuit Voltage (Voc)	21.5V
NOCT:45°C+2 °C	Temperature coefficient Voltage: 0.16V/°c / -(160 +10)mV/oC
	Temperature coefficient of power: -(0.5+0.05)%/oC
	Temperature coefficient Current: 0.06%/°c / (0.065 +0.015)%/oC

Note: defined as standard deviation of thousands measurements. Absolute power values depend on the measuring system. They can differ by +/- 3% from one measuring system to another.

Characteristic curves	
Mechanical characteristics	
Dimensions	
Certificate	CE